


asustor

AS-SAS8e SAS 擴充卡



擴增的儲存解決方案

AS-SAS8e 提供高效能的儲存連接，讓 ASUSTOR NAS 連接至擴增的 SAS JBOD。支援 SAS-3 和 SATA 協議，能夠提升資料傳輸速率與系統效率。適合需要高容量與高吞吐量的企業級應用需求。

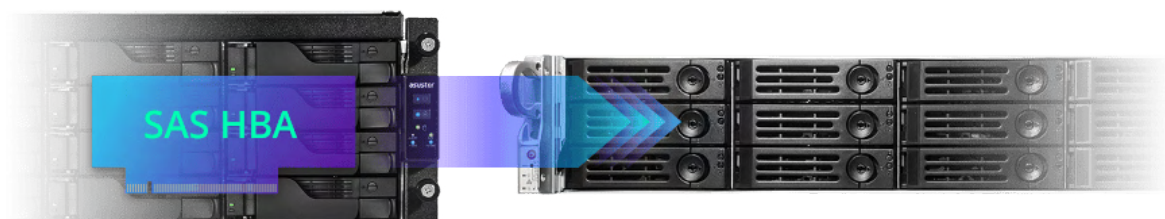

使用Storage Manager 輕鬆設定

使用 ADM (ASUSTOR Data Master) 中 Storage Manager，使得管理和配置 NAS系統與附加的 JBOD 非常直覺。使用 Storage Manager，建立多種RAID設定和快照功能，可進一步增強資料的安全性和可靠性。

Specification	
I/O Controller	SAS3808
External Connectors	2 x4 SFF-8644 (ext HD)
Host Bus Type	x8 lane PCI Express 4.0
Generation	12 Gb/s
External Ports	8
Storage Interface	12Gb/s SAS, 6Gb/s SATA, Gen 4.0 PCIe (NVMe)
Management Software	LSI Storage Authority (LSA), StorCLI (Command-Line Interface), HII (UEFI Human Interface Infrastructure)
MTBF	> 5,000,000 hours at 40° C
Operating Humidity	20% to 80% Non-condensing
Operating Temperature°C	0°C to 55°C
OS Support	ADM 5.0 Microsoft Windows, VMware vSphere/ESXi, Red Hat Enterprise Linux, SUSE Linux Enterprise Server, Citrix XenServer, CentOS Linux, Ubuntu Linux, Debian Linux, Oracle Enterprise Linux, Fedora, FreeBSD
Physical Dimensions	167.65 (+/-0.13) mm x 68.77 (+/-0.13) mm
Weight	300(g) / 0.66 (lb)
Applicable models	AS7112RDX / AS7116RDX PC
Brackets	Full height, low profile and ASUSTOR NAS bracket
Regulatory Certifications	Australia/New Zealand (AS/NZS CISPR 22), Canada ICES-003 Class B, CE Europe (EN55022/EN55024), Europe (EN55022/EN55024), Japan (VCCI V-3), Korea (RRA no 2013-24 & 25), RoHS, Safety: EN/IEC/UL 60950, Taiwan (CNS 13438), USA (FCC 47 CFR part 15 Subpart B, class B), WEEE
Warranty	3 years
Package Contents	AS-SAS8e HBA, Low Profile Bracket, FH (attached), Expansion Bracket



ASUSTOR Inc.

地址：台北市北投區大業路136號3F 電話：+886 2 7737 0888 www.asustor.com

設計和規格如有變更，恕不另行通知。© ASUSTOR Inc. ASUSTOR 和產品名稱之商標或註冊商標為 ASUSTOR 科技公司版權所有。
本文提及的所有其他產品和公司名稱之商標為原該公司所有。

Dealer Seal